

I) **ATTENZIONE!**

Togliere la corrente prima di eseguire qualsiasi collegamento elettrico o sostituire le lampadine.

- 1) **Fig.1** - Infilare i vetri 1 e 2, ed avvitare la rondella A e il gancio B fissandolo in testa alla tige C mediante l'apposita vite.
- 2) **Fig.2** - Agganciare la catena a soffitto con il rosone 3 abbassato e poi il gancio B con il moschettone D.
- 3) Far passare il cavo elettrico tra gli anelli della catena e il tubetto E.
- 4) **Fig.3** - Eseguire il collegamento elettrico alla linea di alimentazione con gli appositi morsetti ed alzare il rosone 3 a soffitto fissandolo con il fondello F.
- 5) Infilare il vetro 4 sostenendolo con la rondella G ed avvitare la borchia H.

]

GB) **WARNING!**

Switch off the current before connecting or relamping

- 1) **Fig.1** - Insert glasses 1 and 2, then screw washer A and fasten closed ring B on the top of stem C.
- 2) **Fig.2** - Hook the chain to ceiling by dropping glass canopy 3 then hook B to spring ring D.
- 3) Pass the golden cable through the rings of chain and inside tube E.
- 4) **Fig.3** - Connect the fixture wires to supply wires with proper terminals and push up canopy 3 to ceiling then fix canopy to tube E with screw F.
- 5) Mount glass 4 by holding it with washer G and screwing stud H.

]

(USA) **WARNING!**

Switch off the current before connecting or relamping

RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS TO BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY.

- 1) **Fig.1** - Insert glasses 1 and 2, then screw washer A and fasten closed ring B on the top of stem C.
- 2) **Fig.2** - Fasten the chain with the crossbar to outlet box to ceiling by dropping glass canopy 3 then hook B to spring ring D.
- 3) Pass the golden cable through the rings of chain and inside tube E.
- 4) **Fig.3** - Connect the fixture wires to supply wires with proper terminals and push up canopy 3 to ceiling then fix canopy to tube E with screw F.
- 5) Mount glass 4 by holding it with washer G and screwing stud H.

U.S.A. OUTLET BOX

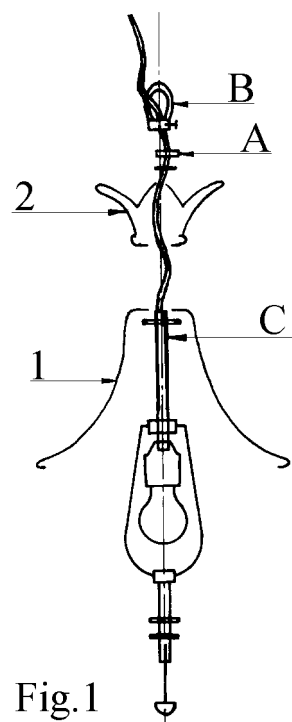
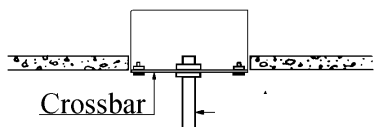


Fig.1

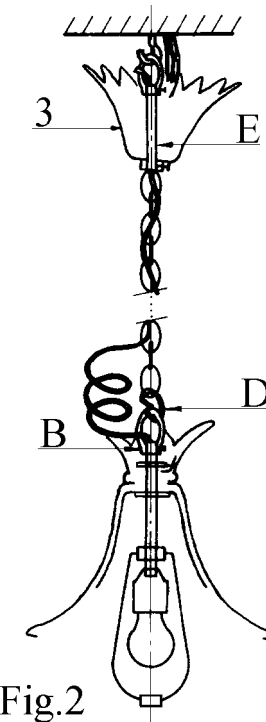


Fig.2

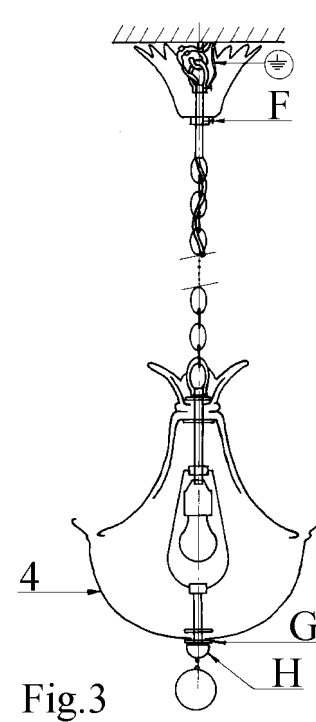


Fig.3

r 4428/OB
r 4428/RO
r 4428/PO
r 4428/DO
r 4428/OO
Sospensioni e Fanali

**FANALE
VENEZIANO**

h. - height cm 47 18 1/2"
Ø cm 32 12 5/8"
Kg. - pounds 6 13,2
r 100 - 120V r 220-240V
50Hz~60Hz
1 x max 100W
E27 r E26 r (medium base)
Cl. I

lampadina chiara/clear bulb: DO, OO.
lampadina opale/white bulb: OB, RO, PO.



Agg.: 27/06/2005